


Calibre No.	6102A	Jewels	21j	Style Name
⇨ Basic Calibre 61A 21J Catalog No. 61-00-1				

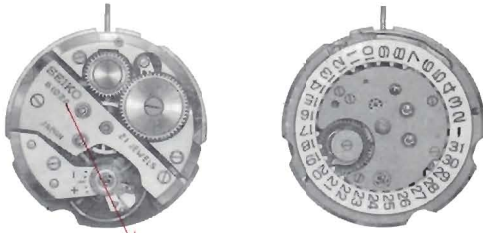

Cal. 6102A

Characteristics

- Casing diameter : 27.00 ϕ mm
- Maximum height : 3.90 mm
- Vibrations per hour : 21,600
- Non-automatic with sweep second
- Calendar (date)
- Instant date setting (rotating crown)
- "Diashock" Shock Resistant Device
- "Diafix" Oil Lubrication Device



131615



224611



225611



241611



271611



283613



383613



384615



385615



387615



388615



802616



803615



810619



814615



817610



990616



☆801615



808619



☆884611

▽	"	
022269	022760	2/1

☆ ⇨ Please see remarks on the reverse page.

As for all other parts not shown here, please refer to the basic calibre

(Cal. No. **61A** 21J Catalog No. 61-00-1 Green page).

Calibre No.	6102A	Jewels	21 j	Style Name
⇒ Basic Calibre 61A 21J Catalog No. 61-00-1				

PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
111614	Barrel bridge	011206	Diafix cap jewel
122612	Center wheel bridge	015113	Diafix spring
131615	Third wheel bridge	☆ 801615	Date dial
161805	Pallet cock	802616	Date driving wheel
171524	Balance cock	803615	Setting wheel lever complete
205617	Complete barrel with arbor	808619	Date dial guard
213617	Barrel arbor	810619	Date jumper
224611	Center wheel & pinion with cannon pinion	814615	Setting wheel lever plate
225611	Cannon pinion	817610	Intermediate date wheel
231617	Third wheel & pinion	☆ 884611	Holding ring for dial
241611	Sweep second wheel & pinion	990616	Date driving wheel holder
251613	Escape wheel & pinion	022150	Stud screw
261615	Minute wheel	022269	Minute wheel bridge screw
271611	Hour wheel	022271	Bridge screw
282615	Clutch wheel	022351	Center wheel bridge screw
283613	Winding pinion	022380	Ratchet wheel screw
285613	Ratchet wheel	022461	Case screw
301611	Jewelled pallet fork & staff	022468	Pallet cock screw
310611	Balance complete with stud	022662	Setting lever spring screw
315611	Balance staff	022760	Date dial guard screw
331610	Roller with jewel	022760	Setting wheel lever plate screw
341613	Regulator	022761	Dial screw
345612	Stud holder	011145	Upper hole jewel for center wheel
354615	Winding stem	011146	Lower hole jewel for center wheel
382612	Click spring	011306	Upper hole jewel for sweep second wheel
383613	Setting lever with axle	011503	Upper hole jewel for pallet
384615	Yoke (Clutch lever)	011503	Lower hole jewel for pallet
385615	Yoke spring (Clutch lever spring)	011701	Hole jewel for minute wheel
387615	Minute wheel bridge	023150	Tube for pallet cock screw (Cylinder type)
388615	Setting lever spring	023151	Tube for bridge screw
☆ 397610	Lever for unlocking stem	023170	Tube for pallet cock screw (Recessed type)
401525	Mainspring (self-greasing)		
014363	Diashock upper frame		
014364	Diashock lower frame		
014365	Diashock hole jewel with frame		
011210	Diashock cap jewel		
014317	Diashock spring		
015421	Diafix upper hole jewel with frame for 3rd wheel		
015421	Diafix lower hole jewel with frame for 3rd wheel		
015411	Diafix upper hole jewel with frame for escape wheel		
015411	Diafix lower hole jewel with frame for escape wheel		

Remarks :

Lever for unlocking stem

☆ 397610 Used only for the one-piece waterproof case.

Date dial

☆ 801615 Used when both the crown and the date frame are located at **3** o'clock.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position

③ the date frame position and ④ the dial No.

Holding ring for dial ———— Measure the total thickness and the outside diameter ————

☆ 884611 1.82 mm total thickness and 29.1 ϕ mm outside diameter

If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.

☆ ⇒ Please see remarks.

Items in light letters are not shown in photos ; those parts are interchangeable with the basic calibre

(Cal. No. **61A** 21J Catalog No. 61-00-1 Green page).