


Calibre No.	6155A	Jewels	25j	Style Name
⇨ Basic Calibre 6146A 25J Catalog No. 61-46-1				



Cal. 6155A

### Characteristics

- Casing diameter : 27.00<sup>ψ</sup> mm
- Maximum height : 5.65 mm
- Vibrations per hour : 36,000
- Automatic and auxiliary hand winding with sweep second
- Calendar (date)
- Instant date setting
- Second-setting device
- Micro-adjustor
- "Diashock" Shock Resistant Device
- "Diafix" Oil Lubrication Device

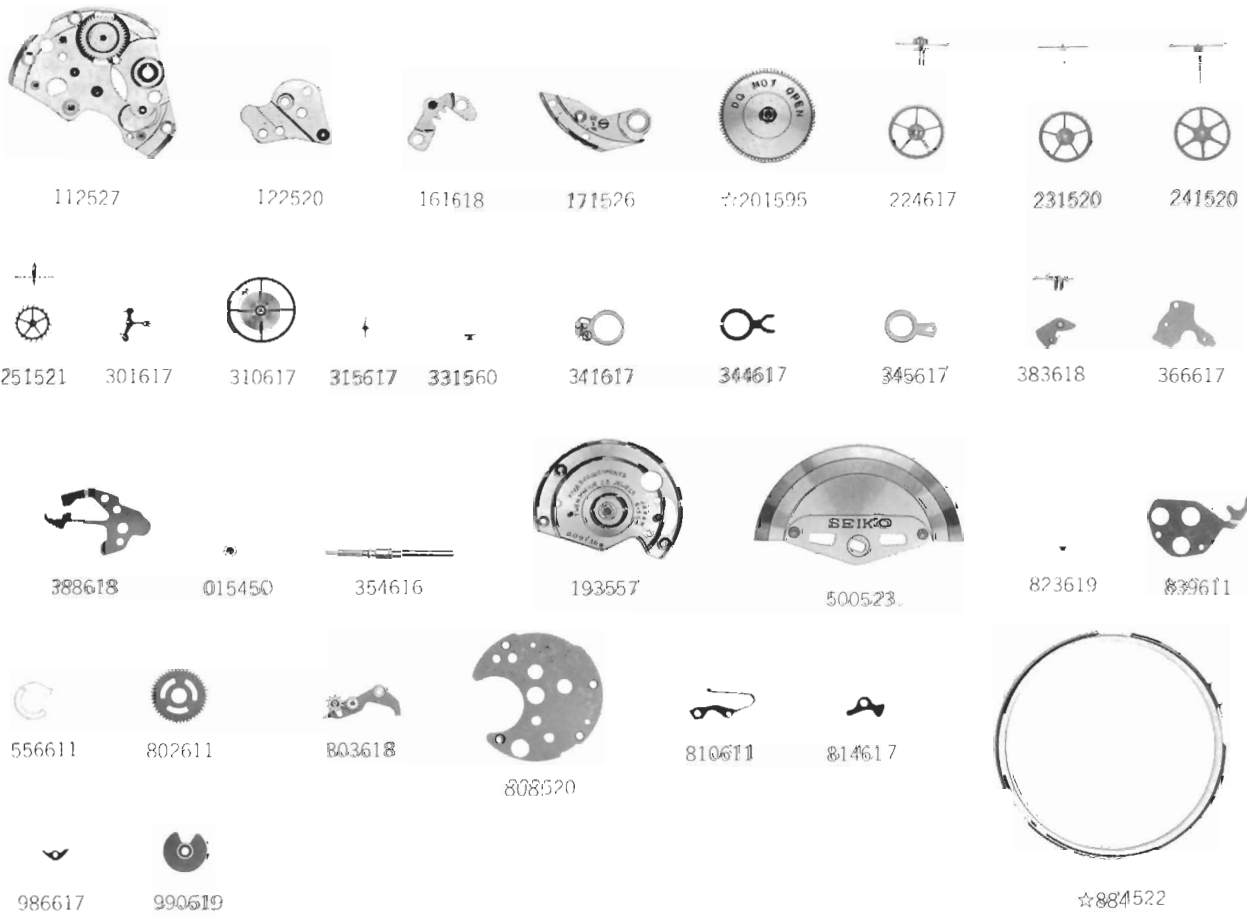

☆⇨ Please see remarks on the reverse page.

As for all other parts not shown here, please refer to the basic calibre

(Cal. No. 6146A 25J Catalog No. 61-46-1 Green page)

Calibre No.	<b>6155A</b>	Jewels	Style Name
		<b>25j</b>	
Basic Calibre <b>6146A</b> 25J Catalog No. 61-46-1			

PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
<b>112527</b>	Barrel & train-wheel bridge	<b>823619</b>	Eccentric post
<b>122520</b>	Center wheel bridge	831615	Pawl lever with jewel
<b>161618</b>	Pallet cock	<b>839611</b>	Holder for transmission wheel & pawl lever
<b>171526</b>	Balance cock	<b>556611</b>	Date finger
<b>193557</b>	Framework for automatic device with ball-bearing	☆801615	Date dial
☆ <b>201595</b>	Complete barrel with arbor & mainspring	<b>802611</b>	Date driving wheel
<b>224617</b>	Center wheel & pinion with cannon pinion	<b>803618</b>	Setting wheel lever complete
225611	Cannon pinion	<b>808520</b>	Date dial guard
<b>231520</b>	Third wheel & pinion	<b>810611</b>	Date jumper
<b>241520</b>	Sweep second wheel & pinion	<b>814617</b>	Setting wheel lever plate
<b>251521</b>	Escape wheel & pinion	817610	Intermediate date wheel
261615	Minute wheel	☆ <b>884522</b>	Holding ring for dial
271611	Hour wheel	<b>986617</b>	Day-date corrector wheel rocking lever
282615	Clutch wheel	<b>990619</b>	Date driving wheel holder
283615	Winding pinion	022150	Stud screw
285615	Ratchet wheel	022252	Holder screw for transmission wheel & pawl lever
<b>301617</b>	Jewelled pallet fork & staff	022269	Minute wheel bridge screw
<b>310617</b>	Balance complete with stud	022270	Framework screw for automatic device with ball-bearing
<b>315617</b>	Balance staff	022271	Bridge screw
<b>331560</b>	Roller with jewel	022351	Center wheel bridge screw
<b>341617</b>	Regulator	022372	Ratchet wheel screw
<b>344617</b>	Regulator adjusting device	<b>022458</b>	Screw for oscillating weight
<b>345617</b>	Stud holder	022468	Pallet cock screw
<b>354616</b>	Winding stem	022662	Setting lever spring screw
381611	Click	022677	Date driving wheel screw
<b>383618</b>	Setting lever with axle	<b>022689</b>	Click screw
384615	Yoke (Clutch lever)	022760	Date dial guard screw
385615	Yoke spring (Clutch lever spring)	022760	Setting wheel lever plate screw
<b>366617</b>	Minute wheel bridge	<b>022761</b>	Dial screw
<b>388618</b>	Setting lever spring	011123	Upper hole jewel for barrel
391615	Second-setting lever	011142	Lower hole jewel for barrel
014363	Diashock upper frame	011718	Upper hole jewel for center wheel
014364	Diashock lower frame	011146	Lower hole jewel for center wheel
014365	Diashock hole jewel with frame	011406	Upper hole jewel for 3rd wheel
011210	Diashock cap jewel	011424	Lower hole jewel for 3rd wheel
014317	Diashock spring	011306	Upper hole jewel for sweep second wheel
015411	Diafix upper hole jewel with frame for escape wheel	011503	Upper hole jewel for pallet
015411	Diafix lower hole jewel with frame for escape wheel	011701	Hole jewel for minute wheel
011206	Diafix cap jewel	011147	Upper hole jewel for transmission wheel
015113	Diafix spring	011147	Lower hole jewel for transmission wheel
<b>015450</b>	Diafix lower hole & cap jewel with frame for pallet	023150	Tube for pallet cock screw (Cylinder type)
<b>500523</b>	Oscillating weight	023151	Tube for bridge screw
505611	Transmission wheel	023170	Tube for pallet cock screw (Recessed type)
		023171	Tube for framework screw of automatic device

**Remarks :**

Complete barrel with arbor & mainspring

☆ **201595**-----Mainspring is set in this complete barrel. It is impossible to open the barrel cover, for the barrel cover is attached firmly on the barrel drum.

Date dial

☆ **801615**-----Used when both the crown and the date frame are located at 3 o'clock.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

Holding ring for dial ----- Measure the total thickness and the outside diameter.

☆ **884522**-----2.32mm total thickness and 29.24mm outside diameter

If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.

☆⇨ Please see remarks.

Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre