


Calibre No.	6206B	Jewels	17j	Style Name
⇨ Basic Calibre 6206A 26J Catalog No. 62-06-1				




Cal. 6206B



Characteristics

Casing diameter : 27.60^φ mm
 Maximum height : 5.60 mm
 Vibrations per hour 18,000
 Automatic winding with sweep second
 Calendar (day & date)
 "Diashock" Shock Resistant Device

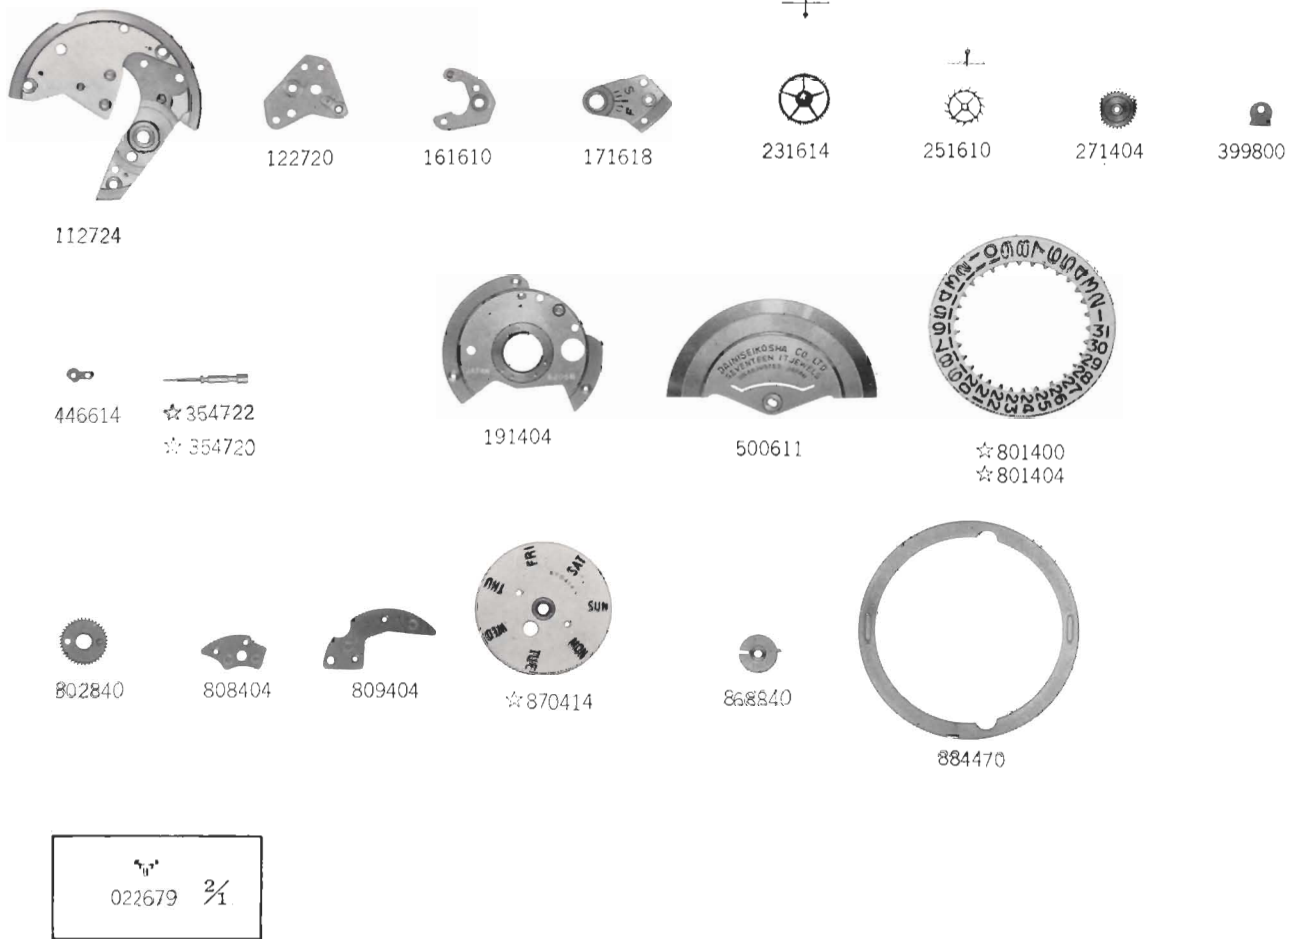

☆⇨ Please see remarks on the next page.

As for all other parts not shown here, please refer to the basic calibre

(Cal. No. 6206A 26J Catalog No. 62-06-1 Green page).

Calibre No. 6206B		Jewels 17j	Style Name	
⇨ Basic Calibre 6206A 26J Catalog No. 62-06-1				
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS	
112724	Barrel & train-wheel bridge	873400	Day jumper	
122720	Center wheel bridge	875400	Day jumper spring	
161610	Pallet cock	884470	Holding ring for dial	
171618	Balance cock	022150	Stud screw	
191404	Framework for automatic device	022250	Pawl lever holder screw	
205408	Complete barrel with arbor	022251	Click screw	
213408	Barrel arbor	022252	Minute wheel bridge screw	
224408	Center wheel & pinion with cannon pinion	022252	Transmission holder screw	
225408	Cannon pinion	022253	Dial screw	
231614	Third wheel & pinion	022254	Framework screw for automatic device	
241400	Sweep second wheel & pinion	022258	Bridge screw	
251610	Escape wheel & pinion	022266	Setting lever axle spring screw	
261720	Minute wheel	022351	Center wheel bridge screw	
271404	Hour wheel	022351	Pallet cock screw	
282720	Clutch wheel	022458	Screw for oscillating weight	
285408	Ratchet wheel	022461	Casing clamp screw	
301610	Jewelled pallet fork & staff	022462	Ratchet wheel screw	
310610	Balance complete with stud	022659	Setting lever spring screw	
315610	Balance staff	022663	Day jumper screw	
331610	Roller with jewel	022679	Screw for day & date driving wheel	
341610	Regulator	022750	Bearing plate screw for sweep second wheel	
345610	Stud holder			
☆ 354720	Winding stem	022752	Date dial guard screw	
☆ 354722		022752	Date jumper guard screw	
381610	Click	022776	Ball-bearing holder screw	
383720	Setting lever	011104	Upper hole jewel for center wheel	
384720	Yoke (Clutch lever)	011104	Lower hole jewel for center wheel	
385720	Yoke spring (Clutch lever spring)	011405	Lower hole jewel for 3rd wheel	
387720	Minute wheel bridge	011406	Upper hole jewel for escape wheel	
388720	Setting lever spring	011406	Lower hole jewel for escape wheel	
389720	Setting lever axle spring	011503	Upper hole jewel for pallet	
390720	Setting lever axle	011503	Lower hole jewel for pallet	
399800	Casing clamp	011112	Upper hole jewel for transmission wheel	
401610	Mainspring with slipping attachment	011112	Lower hole jewel for transmission wheel	
446614	Bearing plate for sweep second wheel	023151	Tube for bridge screw	
491400	Dial washer			
014233	Diashock upper frame			
014244	Diashock lower frame			
014225	Diashock hole jewel with frame			
011210	Diashock cap jewel			
014217	Diashock spring			
500611	Oscillating weight			
505610	Transmission wheel			
821690	Ball-bearing for oscillating weight			
831610	Pawl lever with jewel			
835610	Ball-bearing holder			
836610	Transmission holder			
837610	Pawl lever holder			
☆ 801400	Date dial			
☆ 801404				
802840	Date driving wheel			
803720	Setting wheel lever complete			
808404	Date dial guard			
809404	Date jumper guard			
810720	Date jumper			
811720	Date jumper spring			
814720	Setting wheel lever plate			
817400	Intermediate date wheel			
868840	Day finger			
☆ 870414	Day star with dial disk (English letters)			

☆ ⇨ Please see remarks on the next page.

Items in light letters are not shown in photos ; those parts are interchangeable with the basic calibre

(Cal. No. **6206A** 26J Catalog No. 62-06-1 Green page).

Calibre No.

6206B

Jewels

17j

Style Name

⇒ Basic Calibre **6206A** 26J Catalog No. 62-06-1

Remarks :

Winding stem

- ☆ 354720..... fits to female type crown (see illustration in the basic calibre page)
- ☆ 354722..... fits to male type crown (see illustration in the preceding page)

If the winding stem is required in any other type, specify the relative case number.

Date dial

- ☆ 801400 Used when shaped like fig. (**A**) and both the crown and the date frame are located at **3**o'clock.
- ☆ 801404 Used when shaped like fig. (**B**) and both the crown and the date frame are located at **3**o'clock.

If the date dial of this calibre is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

fig. (**A**)


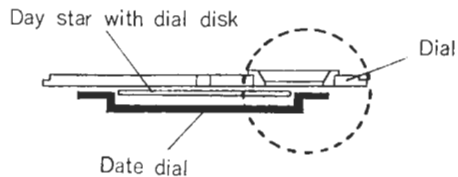


fig. (**B**)

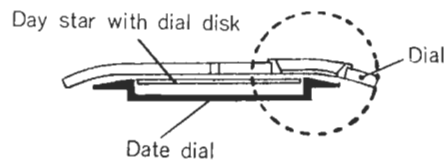

Day star with dial disk

- ☆ 870414 Used when both the crown and the day frame are located at **3**o'clock.

If the day star with dial disk is required in any other type, specify the number printed on the disk.