




Calibre No.	6216A	Jewels	39j	Style Name	(Seikomatic Weekdater)
Basic Calibre 6206A 26J Catalog No. 62-06-1					

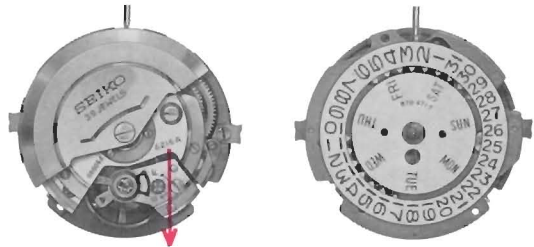

Cal. 6216A

Characteristics

- Casing diameter : 27.60^φ mm
- Maximum height : 5.60 mm
- Vibrations per hour : 19,800
- Automatic winding with sweep second
- Calendar (day & date)
- Second-setting device
- Micro-adjustor
- "Diashock" Shock Resistant Device
- "Diafix" Oil Lubrication Device

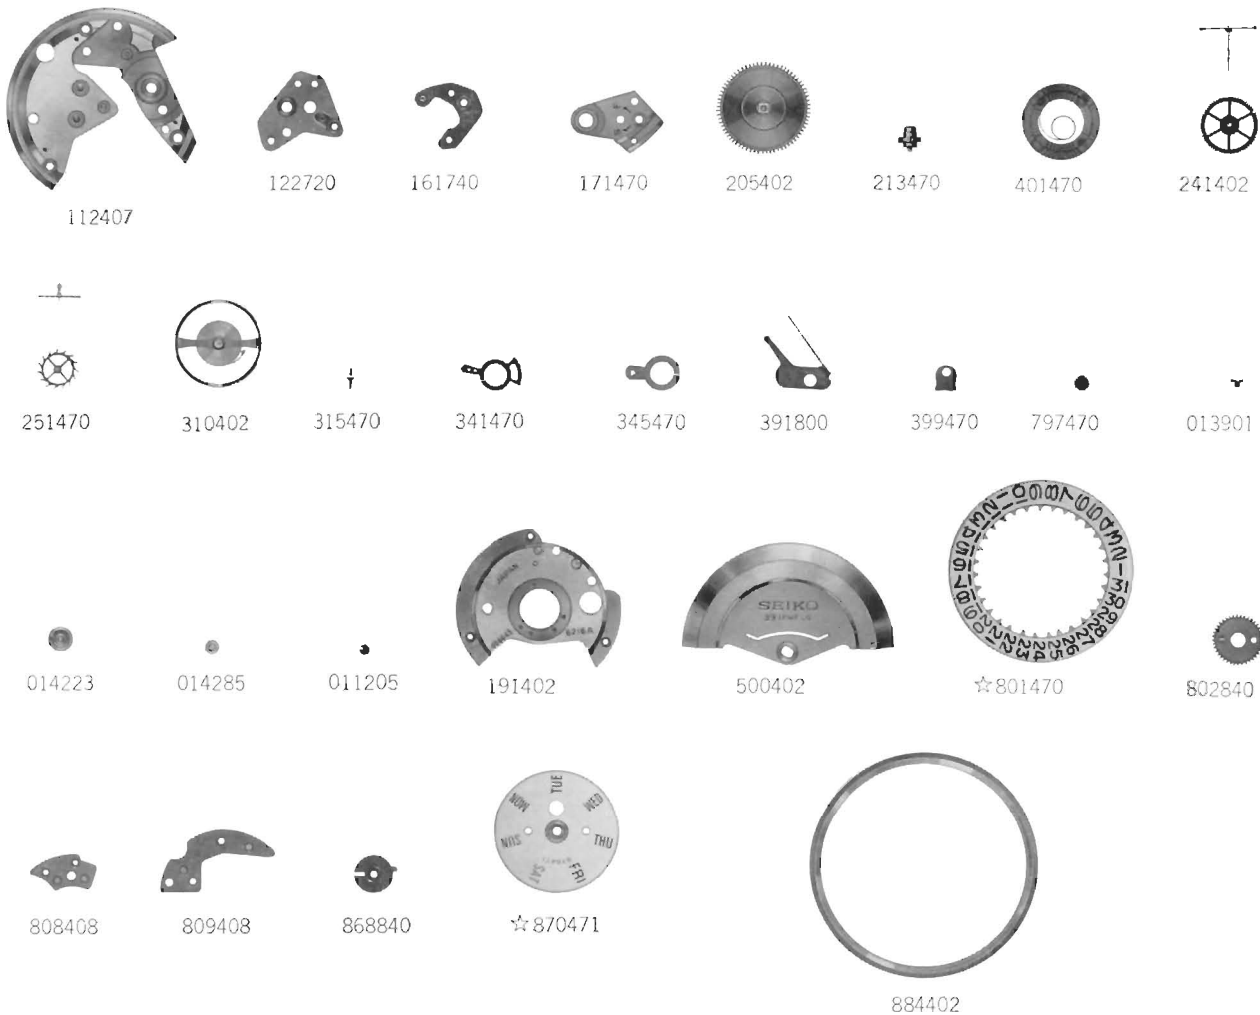

Catalog No. 62-16-1

☆⇨ Please see remarks on the reverse page.

As for all other parts not shown here, please refer to the basic calibre

(Cal. No. 6206A 26J Catalog No. 62-06-1 Green page).

Calibre No.		Jewels	Style Name	
6216A		39 j	(Seikomatic Weekdater)	
⇒ Basic Calibre 6206A 26J Catalog No. 62-06-1				
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS	
112407	Barrel & train-wheel bridge	821690	Ball-bearing for oscillating weight	
122720	Center wheel bridge	831610	Pawl lever with jewel	
161740	Pallet cock	835610	Ball-bearing holder	
171470	Balance cock	836610	Transmission holder	
191402	Framework for automatic device	837610	Pawl lever holder	
205402	Complete barrel with arbor	☆ 801470	Date dial	
213470	Barrel arbor	802840	Date driving wheel	
224408	Center wheel & pinion with cannon pinion	803720	Setting wheel lever complete	
225408	Cannon pinion	808408	Date dial guard	
231617	Third wheel & pinion	809408	Date jumper guard	
241402	Sweep second wheel & pinion	810720	Date jumper	
251470	Escape wheel & pinion	811720	Date jumper spring	
261720	Minute wheel	814720	Setting wheel lever plate	
271408	Hour wheel	817400	Intermediate date wheel	
282720	Clutch wheel	868840	Day finger	
285408	Ratchet wheel	☆ 870471	Day star with dial disk	
301610	Jewelled pallet fork & staff	873400	Day jumper	
310402	Balance complete with stud	875400	Day jumper spring	
315470	Balance staff	884402	Holding ring for dial	
331610	Roller with jewel	022150	Stud screw	
341470	Regulator	022250	Pawl lever holder screw	
345470	Stud holder	022251	Click screw	
354720	Winding stem	022252	Minute wheel bridge screw	
381610	Click	022252	Transmission holder screw	
383720	Setting lever	022253	Dial screw	
384720	Yoke (Clutch lever)	022254	Framework screw for automatic device	
385720	Yoke spring (Clutch lever spring)	022258	Bridge screw	
387720	Minute wheel bridge	022266	Setting lever axle spring screw	
388720	Setting lever spring	022351	Center wheel bridge screw	
389720	Setting lever axle spring	022351	Pallet cock screw	
390720	Setting lever axle	022458	Screw for oscillating weight	
391800	Second-setting lever	022461	Casing clamp screw	
399470	Casing clamp	022462	Ratchet wheel screw	
401470	Mainspring with slipping attachment	022463	Second-setting lever screw	
446610	Bearing plate for sweep second wheel	022659	Setting lever spring screw	
491400	Dial washer	022663	Day jumper screw	
797470	Micro-adjustor wheel	022679	Screw for day & date driving wheel	
014223	Diashock upper frame	022750	Bearing plate screw for sweep second wheel	
014244	Diashock lower frame	022752	Date dial guard screw	
014285	Diashock hole jewel with frame	022752	Date jumper guard screw	
011205	Diashock upper cap jewel	022776	Ball-bearing holder screw	
011210	Diashock lower cap jewel	011115	Upper hole jewel for barrel	
014217	Diashock spring	011105	Lower hole jewel for barrel	
015421	Diafix upper hole jewel with frame for 3rd wheel	011104	Upper hole jewel for center wheel	
015421	Diafix lower hole jewel with frame for 3rd wheel	011104	Lower hole jewel for center wheel	
015411	Diafix upper hole jewel with frame for escape wheel	011307	Upper hole jewel for sweep second wheel	
015411	Diafix lower hole jewel with frame for escape wheel	011503	Upper hole jewel for pallet	
011206	Diafix cap jewel	011503	Lower hole jewel for pallet	
015113	Diafix spring	011112	Upper hole jewel for transmission wheel	
500402	Oscillating weight	011112	Lower hole jewel for transmission wheel	
505610	Transmission wheel	013901	Micro-adjustor wheel pin	
		023151	Tube for bridge screw	
		023154	Tube for second setting lever screw	
Remarks :				
☆801470 } Used when the crown is located at 4 o'clock and the day & date frame at 3 o'clock. If the date dial or the day				
☆870471 } star with dial disk is required in any other type, specify ① Cal.No. ② the crown position ③ the date frame				
position ④ the day frame position and ⑤ the dial No.				

☆⇒ Please see remarks.

Items in light letters are not shown in photos ; those parts are interchangeable with the basic calibre

(Cal. No. **6206A** 26J Catalog No. 62-06-1 Green page).