


# Calibre 1055 & 1055B

Base Calibre 1030

- Ø28.5mm
- Train: 18.000
- Automatic
- Date & day of the week
- Sweep second
- Shock Proof

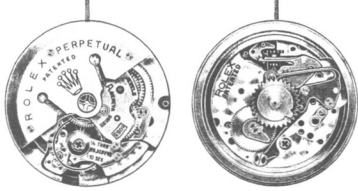

1 : 1

1055



7120



7122



7121



7123



7125



7126



7127



7128



7130



7131



7132



7134



7135



7136



7138



7139



7141



7142



7143



7145



7146



7152



8017

2 : 1



7133



7137



7140



7147



7999

1 : 1

1055 B




7155 B



7157 B



7158 B



7161 B

2 : 1



7156 B



7159 B

	<b>7120</b>	<i>Plate</i>		<b>7147</b>	<i>Set of screws for 1 watch movement</i>
	<b>7121</b>	<i>Center wheel with cannon pinion</i>			
1040	<b>7122</b>	<i>Balance cock</i>	1555	<b>7152</b>	<i>Bridle</i>
1040	<b>7123</b>	<i>Balance with Breguet hairspring, regulated</i>	1555	<b>7155 B</b>	<i>Star impulse finger</i>
	<b>7125</b>	<i>Cannon pinion, height 3,40 mm</i>		<b>7156 B</b>	<i>Screw for : Star impulse finger</i>
	<b>7126</b>	<i>Sweep-second pinion</i>		<b>7157 B</b>	<i>Date jumper</i>
1040	<b>7127</b>	<i>« Rolex Shock- resisting » device for balance, upper</i>		<b>7158 B</b>	<i>Day check-spring</i>
	<b>7128</b>	<i>Bridge for self- winding mechanism</i>		<b>7159 B</b>	<i>Set of screws for 1 watch movement</i>
	<b>7130</b>	<i>Double tothing hour wheel, height 2,46 mm</i>	1555	<b>7161 B</b>	<i>Calendar ring, ref. 6611</i>
1036	<b>7131</b>	<i>Calendar yoke</i>	1555	<b>7999</b>	<i>Screw for : Bridle</i>
	<b>7132</b>	<i>Calendar yoke spring</i>		<b>8017</b>	<i>Day disc</i>
	<b>7133</b>	<i>Screw for : Calendar yoke spring</i>			
	<b>7134</b>	<i>Cam with cannon</i>			
1555	<b>7135</b>	<i>Calendar wheel</i>			
	<b>7136</b>	<i>Star impulse finger</i>			
	<b>7137</b>	<i>Screw for : Star impulse finger</i>			
	<b>7138</b>	<i>Date jumper</i>			
	<b>7139</b>	<i>Day check-spring</i>			
	<b>7140</b>	<i>Screw for : Day check-spring</i>			
1555	<b>7141</b>	<i>Star unit</i>			
	<b>7142</b>	<i>Calendar ring, ref. 6511</i>			
	<b>7143</b>	<i>Calendar ring, ref. 6611</i>			
	<b>7145</b>	<i>Date disc</i>			
	<b>7146</b>	<i>Complete rotor</i>			