


Calibre No.	603	Jewels	30j	Style Name	(Seikomatic)
⇒ Basic Calibre 6201B 17J Catalog No. 62-01-1					



Cal. 603 30j

Characteristics

- Casing diameter : 27.60^φ mm
- Maximum height : 4.80 mm
- Vibrations per hour : 18,000
- Automatic winding with sweep second
- "Diashock" Shock Resistant Device
- "Diafix" Oil Lubrication Device

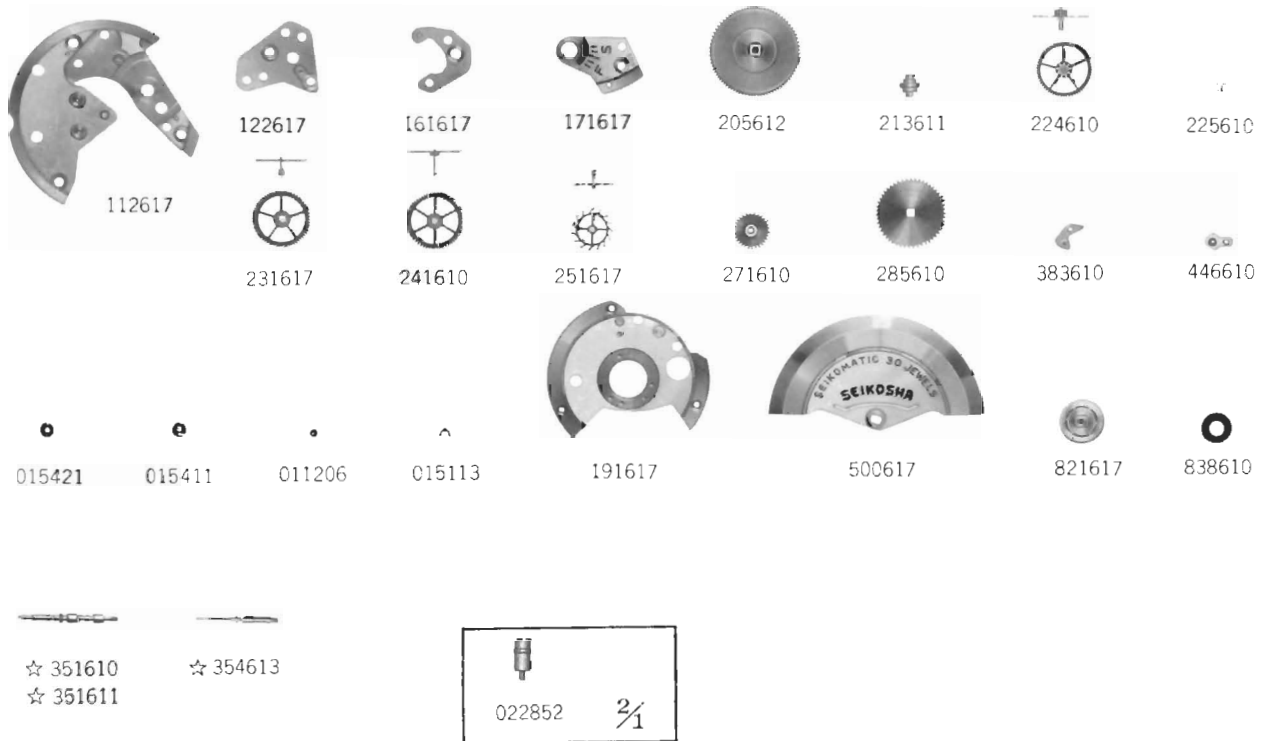

☆⇒ Please see remarks on the reverse page.

As for all other parts not shown here, please refer to the basic calibre (Cal. No. 6201B 17J Catalog No. 62-01-1 Green page).

Calibre No.		Jewels	Style Name	
603		30j	(Seikomatic)	
↳ Basic Calibre 6201B 17J Catalog No. 62-01-1				
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS	
112617	Barrel & train-wheel bridge	500617	Oscillating weight	
122617	Center wheel bridge	505610	Transmission wheel	
161617	Pallet cock	821617	Ball-bearing for oscillating weight	
171617	Balance cock	831610	Pawl lever with jewel	
191617	Framework for automatic device	835610	Ball-bearing holder	
205612	Complete barrel with arbor	836610	Transmission holder	
213611	Barrel arbor	837610	Pawl lever holder	
224610	Center wheel & pinion with cannon pinion	838610	Pawl lever seat	
225610	Cannon pinion	022150	Stud screw	
231617	Third wheel & pinion	022250	Pawl lever holder screw	
241610	Sweep second wheel & pinion	022251	Click screw	
251617	Escape wheel & pinion	022252	Transmission holder screw	
261610	Minute wheel	022254	Framework screw for automatic device	
271610	Hour wheel	022258	Bridge screw	
281610	Setting wheel	022264	Dial screw	
282610	Clutch wheel	022351	Center wheel bridge screw	
285610	Ratchet wheel	022351	Pallet cock screw	
301610	Jewelled pallet fork & staff	022458	Screw for oscillating weight	
310610	Balance complete with stud	022460	Case screw	
315610	Balance staff	022462	Ratchet wheel screw	
331610	Roller with jewel	022657	Setting lever spring screw	
341610	Regulator	022750	Bearing plate screw for sweep second wheel	
345610	Stud holder	022752	Minute wheel bridge screw	
☆ 351610	Winding stem	022776	Ball-bearing holder screw	
☆ 351611		022852	Setting lever screw	
☆ 354613		011104	Upper hole jewel for center wheel	
381610	Click	011117	Lower hole jewel for center wheel	
383610	Setting lever	011307	Upper hole jewel for sweep second wheel	
384610	Yoke (Clutch lever)	011503	Upper hole jewel for pallet	
385610	Yoke spring (Clutch lever spring)	011503	Lower hole jewel for pallet	
387610	Minute wheel bridge	011112	Upper hole jewel for transmission wheel	
388610	Setting lever spring	011112	Lower hole jewel for transmission wheel	
401610	Mainspring with slipping attachment	023151	Tube for bridge screw	
446610	Bearing plate for sweep second wheel			
491610	Dial washer			
014233	Diashock upper frame			
014244	Diashock lower frame			
014225	Diashock hole jewel with frame			
011210	Diashock cap jewel			
014217	Diashock spring			
015421	Diafix upper hole jewel with frame for 3rd wheel			
015421	Diafix lower hole jewel with frame for 3rd wheel			
015411	Diafix upper hole jewel with frame for escape wheel			
015411	Diafix lower hole jewel with frame for escape wheel			
011206	Diafix cap jewel			
015113	Diafix spring			
Remarks:				
☆ 351610 For the non-waterproof case having an outside diameter of 35.5 ϕ mm.				
☆ 351611 For the non-waterproof case having an outside diameter of 36.6 ϕ mm.				
☆ 354613 For the waterproof case.				

☆ ⇨ Please see remarks.

Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre

(Cal. No. 6201B 17J Catalog No. 62-01-1 Green page).