


Calibre No.	<b>430, 5722A</b>	Jewels	<b>35 j</b>	Style Name	<b>( Grand Seiko Selfdater )</b>
⇨ Basic Calibre 3180 25J Catalog No. 57-20-1					



Cal. 5722A ( or 430 )

### Characteristics

- Chronometer
- Casing diameter : 27.60<sup>φ</sup> mm
- Maximum height : 4.75 mm
- Vibrations per hour : 18,000
- Non-automatic with sweep second
- Micro-adjustor
- Second-setting device
- Calendar ( date )
- "Diashock" Shock Resistant Device
- "Diafix" Oil Lubrication Device

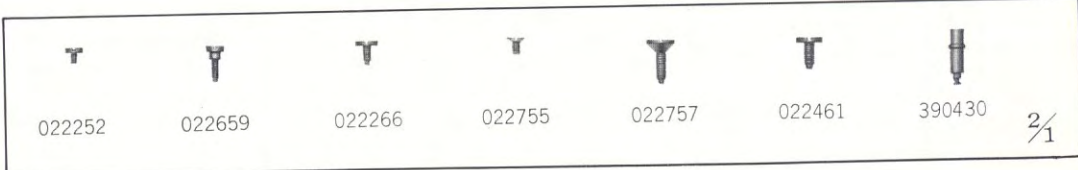

Catalog No. 57-22-1

☆ ⇨ Please see remarks on the reverse page.  
As for all other parts not shown here, please refer to the basic calibre.



Calibre No. <b>430,5722A</b>		Jewels <b>35j</b>	Style Name <b>( Grand Seiko Selfdater )</b>	
⇒ Basic Calibre 3180 25J Catalog No. 57-20-1				
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS	
<b>111430</b>	<b>Barrel bridge</b>			3rd wheel
122570	Center wheel bridge	015421	Diafix lower hole jewel with frame for 3rd wheel	
<b>131430</b>	<b>Third wheel bridge</b>	015431	Diafix upper hole jewel with frame for sweep second wheel	
161640	Pallet cock	015411	Diafix upper hole jewel with frame for escape wheel	
<b>171430</b>	<b>Balance cock</b>	015411	Diafix lower hole jewel with frame for escape wheel	
<b>205430</b>	<b>Complete barrel with arbor &amp; jewel</b>	011206	Diafix cap jewel	
<b>213430</b>	<b>Barrel arbor</b>	015113	Diafix spring	
<b>224430</b>	<b>Center wheel &amp; pinion with cannon pinion</b>	☆ <b>801430</b>	<b>Date dial</b>	
<b>225430</b>	<b>Cannon pinion</b>	<b>802720</b>	<b>Date driving wheel</b>	
231640	Third wheel & pinion	<b>803430</b>	<b>Setting wheel lever complete</b>	
<b>241430</b>	<b>Sweep second wheel &amp; pinion</b>	<b>808430</b>	<b>Date dial guard</b>	
251570	Escape wheel & pinion	<b>809430</b>	<b>Date jumper guard</b>	
<b>261430</b>	<b>Minute wheel</b>	<b>810720</b>	<b>Date jumper</b>	
<b>271430</b>	<b>Hour wheel</b>	<b>811430</b>	<b>Date jumper spring</b>	
<b>282430</b>	<b>Clutch wheel</b>	<b>812430</b>	<b>Setting wheel lever spring</b>	
283570	Winding pinion	<b>814430</b>	<b>Setting wheel lever plate</b>	
284640	Crown wheel	<b>817720</b>	<b>Intermediate date wheel</b>	
285640	Ratchet wheel	022150	Stud screw	
301640	Jewelled pallet fork & staff	022151	Bearing plate screw for sweep second wheel	
310640	Balance complete with stud	<b>022252</b>	<b>Minute wheel bridge screw</b>	
315570	Balance staff	022255	Pallet cock screw	
331610	Roller with jewel	022259	Bridge screw	
341640	Regulator	<b>022266</b>	<b>Setting lever axle spring screw</b>	
344640	Regulator adjusting device	022352	Center wheel bridge screw	
345640	Stud holder	022453	Ratchet wheel screw	
351572	Winding stem	<b>022461</b>	<b>Case screw</b>	
381570	Click	022578	Crown wheel screw	
382620	Click spring	022652	Click screw	
<b>383700</b>	<b>Setting lever</b>	<b>022659</b>	<b>Setting lever spring screw</b>	
<b>384430</b>	<b>Yoke ( Clutch lever )</b>	<b>022755</b>	<b>Date dial guard screw</b>	
<b>385430</b>	<b>Yoke spring ( Clutch lever spring )</b>	<b>022755</b>	<b>Date jumper guard screw</b>	
<b>387430</b>	<b>Minute wheel bridge</b>	<b>022757</b>	<b>Dial screw</b>	
<b>388430</b>	<b>Setting lever spring</b>	011123	Upper hole jewel for barrel	
<b>389720</b>	<b>Setting lever axle spring</b>	011105	Upper hole jewel for center wheel	
<b>390430</b>	<b>Setting lever axle</b>	011105	Lower hole jewel for center wheel	
<b>391430</b>	<b>Second-setting lever</b>	011503	Upper hole jewel for pallet	
395640	Micro-adjustor	011503	Lower hole jewel for pallet	
398640	Second setting lever washer	013901	Micro-adjustor pin	
<b>401430</b>	<b>Mainspring ( self-greasing )</b>	023151	Tube for bridge screw	
446570	Bearing plate for sweep second wheel			
481570	Crown wheel ring			
491610	Dial washer			
014223	Diashock upper frame			
014214	Diashock lower frame			
014215	Diashock hole jewel with frame			
011205	Diashock cap jewel			
014217	Diashock spring			
015421	Diafix upper hole jewel with frame for			
<b>Remarks :</b>				
☆ 801430 Used for the dial where the date frame is located at the 3 o'clock position. If the date dial of any other types is required for this calibre, please inform clearly ① the Cal. No. and ② the date frame position.				

☆⇒ Please see remarks.

Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre

( Cal. No. 3180 25J Catalog No. 57-20-1 Green page ).