


Calibre No.	6217A	Jewels	17j	Style Name
⇨ Basic Calibre 6205B 17J Catalog No. 62-05-1				





Cal. 6217A



### Characteristics

- Casing diameter : 27.60<sup>φ</sup> mm
- Maximum height : 5.35 mm
- Vibrations per hour : 18,000
- Automatic winding with sweep second
- Calendar ( date )
- "Diashock" Shock Resistant Device

Catalog No. 62-17-1

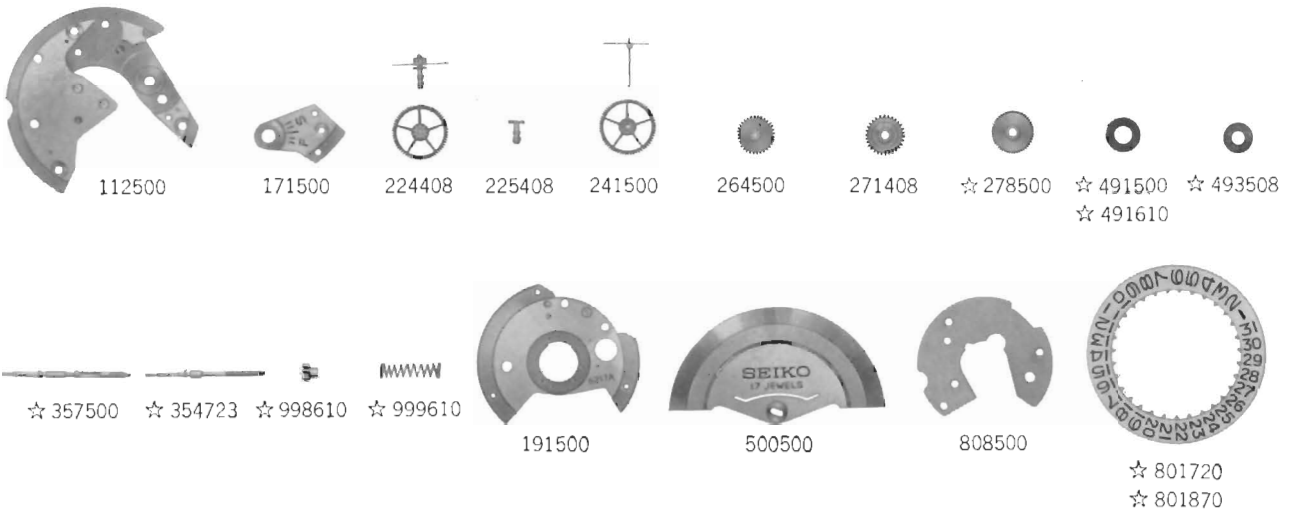

☆⇨ Please see remarks on the reverse page.

As for all other parts not shown here, please refer to the basic calibre ( Cal. No. **6205B** 17J Catalog No. 62-05-1 (Green page) )

Calibre No.	<b>6217A</b>	Jewels	Style Name
⇨ Basic Calibre <b>6205B</b> 17J Catalog No. 62-05-1		<b>17j</b>	

PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS
<b>112500</b>	<b>Barrel &amp; train-wheel bridge</b>	836610	Transmission holder
122720	Center wheel bridge	837610	Pawl lever holder
161740	Pallet cock	☆ <b>801720</b>	<b>Date dial</b>
<b>171500</b>	<b>Balance cock</b>	☆ 801870	
<b>191500</b>	<b>Framework for automatic device</b>	802720	Date driving wheel
205408	Complete barrel with arbor	803720	Setting wheel lever complete
213408	Barrel arbor	<b>808500</b>	<b>Date dial guard</b>
<b>224408</b>	<b>Center wheel &amp; pinion with cannon pinion</b>	810720	Date jumper
<b>225408</b>	<b>Cannon pinion</b>	811720	Date jumper spring
231614	Third wheel & pinion	814720	Setting wheel lever plate
<b>241500</b>	<b>Sweep second wheel &amp; pinion</b>	817720	Intermediate date wheel
251610	Escape wheel & pinion	☆ <b>998610</b>	<b>Indicator wheel</b>
<b>264500</b>	<b>Minute wheel</b>	☆ <b>999610</b>	<b>Indicator wheel spring</b>
<b>271408</b>	<b>Hour wheel</b>	022150	Stud screw
☆ <b>278500</b>	<b>Hour wheel, 24h</b>	022250	Pawl lever holder screw
282720	Clutch wheel	022251	Click screw
285408	Ratchet wheel	022252	Minute wheel bridge screw
301610	Jewelled pallet fork & staff	022252	Transmission holder screw
310610	Balance complete with stud	022253	Dial screw
315610	Balance staff	022254	Framework screw for automatic device
331610	Roller with jewel	022258	Bridge screw
341610	Regulator	022266	Setting lever axle spring screw
345610	Stud holder	022351	Center wheel bridge screw
☆ <b>354723</b>	<b>Winding stem</b>	022351	Pallet cock screw
☆ <b>357500</b>		<b>022456</b>	<b>Case screw</b>
381610	Click	022458	Screw for oscillating weight
383720	Setting lever	022462	Ratchet wheel screw
384720	Yoke (Clutch lever)	022659	Setting lever spring screw
385720	Yoke spring (Clutch lever spring)	022750	Bearing plate screw for sweep second wheel
387720	Minute wheel bridge	022755	Date dial guard screw
388720	Setting lever spring	022776	Ball-bearing holder screw
389720	Setting lever axle spring	011104	Upper hole jewel for center wheel
390720	Setting lever axle	011104	Lower hole jewel for center wheel
401610	Mainspring with slipping attachment	011405	Lower hole jewel for 3rd wheel
446614	Bearing plate for sweep second wheel	011406	Upper hole jewel for escape wheel
☆ <b>491500</b>	<b>Dial washer</b>	011406	Lower hole jewel for escape wheel
☆ 491610		011503	Upper hole jewel for pallet
☆ <b>493508</b>	<b>Hour wheel ring</b>	011503	Lower hole jewel for pallet
014233	Diashock upper frame	011112	Upper hole jewel for transmission wheel
014244	Diashock lower frame	011112	Lower hole jewel for transmission wheel
014225	Diashock hole jewel with frame	023151	Tube for bridge screw
011210	Diashock cap jewel		
014217	Diashock spring		
<b>500500</b>	<b>Oscillating weight</b>		
505610	Transmission wheel		
821690	Ball-bearing for oscillating weight		
831610	Pawl lever with jewel		
835610	Ball-bearing holder		

**Remarks:**

- ☆ 354723 } Applied only to the case No. 6217-8000 ( Divers watch )
- ☆ 491610 }
- ☆ 493508 }
- ☆ 278500 } Applied only to the "WORLD TIME"
- ☆ 357500 }
- ☆ 491500 }
- ☆ 998610 }
- ☆ 999610 }
- ☆ 801720 Used for the case & dial where the crown is located at the 4 o'clock position and the date frame is at the 3 o'clock position, respectively.
- ☆ 801870 Used for the case & dial where both the crown and the date frame are located at the 3 o'clock position.

☆ ⇨ Please see remarks.  
 Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre  
 ( Cal. No. **6205B** 17J Catalog No. 62-05-1 Green page ).